

Above-The-Neck **Protection Solutions**

Compatible safety products to protect your head, face, hearing and vision



*Because every life has a **purpose...***

Join the millions around the globe who choose MSA: For safety. For value.

This catalog highlights MSA's comprehensive head, eye, face and hearing (HEFH) protection line. Our hard hats, eye/face protection products, helmet accessories, hearing protection products—and more—provide seamless safety solutions to protect workers around the world. For a complete product listing, see the most recent MSA Safety Equipment Catalog, call our award-winning customer service department, or visit MSAsafety.com.

Save money, increase revenue and reduce inventory costs with our comprehensive Above-the-Neck safety solutions:


- “Try It” sample program offers 100+ leading MSA products, including V-Gard Helmets, V-Gard Accessories, left/RIGHT earmuffs, and Sightgard® eyewear—completely **FREE of charge!** Look for the  that tells you which products are in the program.
- Our products are tested by engineers in our own test facilities. **They are also certified by qualified, third-party test houses.**

Table of Contents

V-Gard® GREEN Protective Helmet3
V-Gard Protective Caps and Hats4-5
Replacement Suspensions for MSA Safety Helmets6
Helmet Customization7
Thermalgard® Protective Caps and Hats8
Topgard® Protective Caps and Hats9
Skullgard® Protective Caps and Hats10
V-Gard Headgear11
V-Gard Accessory System12-27
V-Gard Frames12-15
V-Gard Visors16-27
V-Gard Chin Protectors28
V-Gard Accessory System Kits28
V-Gard Accessory Replacement Parts28
V-Gard Winter Liners29-30
Helmet Accessories31-32
Hearing Protection33-36
Sightgard® Vertoggle™ Safety Goggle/Faceshield Combination36
Sightgard Protective Eyewear37-45
Sightgard Safety Glasses37-43
Sightgard Safety Goggles44
Eyewear Accessories45

V-Gard® GREEN Protective Helmet



The world's first hard hat made from renewable resources

V-Gard GREEN Helmets offer the same trusted look and quality customers have come to expect from their MSA V-Gard Helmet. The V-Gard GREEN helmet is made with renewable GHDPE, while the traditional V-Gard helmet is made through standard HDPE production methods. The test results for V-Gard GREEN helmet shells indicated a biobased content of 95%.



- Classification:** Type I
- Market(s):** General industry, manufacturing, repair and maintenance, construction, oil and gas, shipbuilding, automotive, mining
- Application:** General purpose
- Shell Material:** Green high-density polyethylene (GHDPE)
- Available Styles:** Slotted cap with 4-point Fas-Trac® III Suspension
 - Sizes:** Standard (6-1/2" to 8")
 - Standards:** ANSI/ISEA Z89.1-2009 (Class E); CSA Z94.1-2005 (Class E)
- Certification:** Third-party by SEI
USDA Biobased Certified
- Customization:** Logos, striping and MSA accessories available *(see page 7)*
- Replacement Suspensions:** See page 6



White	Yellow	Blue	Green	Red
10150199	10150200	10150221	10150222	10150223



On average, the production of each V-Gard GREEN helmet removes approximately 2 lbs. of CO₂ from the atmosphere, according the GHDPE material supplier.

V-Gard Protective Caps and Hats

Classification: Type I

Application: General purpose

Shell Material: Polyethylene

Available Styles: Slotted Cap; Slotted Full-Brim Hat

Sizes: **Cap:** Small (6 – 7 $\frac{1}{8}$ ""); Standard (6 $\frac{1}{2}$ – 8"); Large (7 – 8 $\frac{1}{2}$ ") **Hat:** Standard (6 $\frac{1}{2}$ – 8")

Standards: ANSI/ISEA Z89.1-2009 (Class E); CSA Z94.1-2005 (Class E)

Certification: Third-party by SEI

Customization: Imprinting and striping available (*see page 7*)

Replacement Suspensions: See page 6



V-Gard Cap
with Fas-Trac III
Suspension

NOTE: Small and Large V-Gard Caps are NOT CSA-certified. Standard-size V-Gard Caps and Hats are CSA-certified when assembled with MSA's Fas-Trac III or 1-Touch Suspension ONLY.

Color	Standard V-Gard Slotted Cap			V-Gard Slotted Full-Brim Hat				
		w/ Staz-On® Suspension	w/ 1-Touch® Suspension	w/ Fas-Trac®III Suspension		w/ Staz-On Suspension	w/ 1-Touch Suspension	w/ Fas-Trac III Suspension
WHITE		463942	10057441	475358		454733	10058321	475369
BLUE		463943	10057442	475359		454732	10058320	475368
YELLOW		463944	10057443	475360		454730	10058318	475366
ORANGE		463945	10057444	475361		454734	10058322	496075
RED		463947	10057446	475363		454736	10058324	475371
GREEN		463946	10057445	475362		454735	10058323	475370
GRAY		463948	10057447	475364		454731	10058319	475367
HI-VIZ® ORANGE ²		488148	10057420	488146		489360	10058326	10021292
HI-VIZ YELLOW-GREEN ²		—	10061514	10061512		—	10061516	10061515
BRIGHT LIME GREEN		815558	—	815565		815562	—	815570
DARK (CANADIAN) BLUE		—	—	802972		—	—	802975
HOT PINK		10155231	—	10155230		10156374	—	10156373

(Continued on next page.)

V-Gard Protective Caps and Hats *(continued from previous page)*

Color	Standard V-Gard Slotted Cap			V-Gard Slotted Full-Brim Hat		
		w/ Staz-On Suspension	w/ 1-Touch® Suspension ¹	w/ Fas-Trac III Suspension ¹	w/ Staz-On Suspension	w/ Fas-Trac III Suspension ¹
GOLD		464852	—	475365	—	—
ROBIN'S EGG BLUE		463111	—	495853	—	—
BROWN		464658	—	495854	—	—
SILVER		484340	—	495855	—	—
TAN		461180	—	—	—	—
BLACK		475235	—	492559	—	—
LIGHT BUFF		478237	—	495856	—	—
PURPLE		488398	—	495858	—	—
PINK		—	—	495862	—	—
SPECIAL V-GARD ASSEMBLIES						
HI-VIZ ORANGE <i>w/Yellow-Green Stripe²</i>		—	10102195	10102193	—	—
HI-VIZ YELLOW-GREEN <i>w/Red-Orange Stripe²</i>		—	10102234	10102233	—	—
HI-VIZ YELLOW-GREEN <i>w/Silver Stripe²</i>		—	10102196	10102194	—	—
WHITE <i>w/Lamp Bracket and Cord Holder (Class C)</i>		460018	—	—	460069	815009
WHITE <i>w/American Flag</i>		474159	—	—	—	—
V-GARD ASSEMBLY WITH SWING-RATCHET SUSPENSION						
WHITE		10004689	White standard-size V-Gard Cap, w/Swing-Ratchet Suspension			



All V-Gard helmets have UV inhibitor molded right in.

¹Certified to CSA.

²V-Gard Cap/Hat meets the voluntary standard for hi-visibility as prescribed by ANSI/ISEA Z89.1-2009. Look for the official hi-visibility marking [HV] on the helmet's ANSI label.

NOTE: Standard size V-Gard Caps and Hats are CSA-certified when assembled with MSA's Fas-Trac, Fas-Trac III or 1-Touch Suspension ONLY.

Replacement Suspensions for MSA Safety Helmets

MSA Fas-Trac® III Suspension

Ensuring your workforce wears their safety helmets can be a real headache. MSA, the leading provider of protective helmets, has the perfect remedy: the Fas-Trac III Suspension. No more pressure headaches. No more pulled hair. No more falling off. No more sacrificing worker comfort for safety.

- 1 Sweatband fully covers the headband and worker's forehead.
- 2 Three levels of nape strap adjustment for customized fit.
- 3 Lower nape strap cradles the head. Retention is greatly improved—even when bending over!
- 4 Smooth ratchet rotation and secure hold.


Learn how the Fas-Trac III Suspension can relieve your headaches. Visit MSAsafety.com/FasTrac.



HELMET TYPE (SIZE)	SUSPENSION TYPE (4-point, unless otherwise noted)			
	Fast-Trac III	1-Touch	Staz-On	Swing Ratchet ¹
V-GARD CAP OR HAT (STANDARD)	10148708	10061123	10087218	816645
V-GARD CAP (SMALL)	10148706	—	467386	—
V-GARD CAP (LARGE)	10148707	—	492566	—
V-GARD 500 VENTED OR NON-VENTED (STANDARD)	10148708 (4-point) 10153382 (6-point)	—	—	—
SMOOTHDOME CAP (STANDARD)	10148708 (4-point) 10153382 (6-point)	—	—	—
TOPGARD CAP OR HAT (STANDARD)	10153384	10061127	—	816648
THERMALGARD CAP (STANDARD)	10153384	—	—	—
SKULLGARD CAP OR HAT (STANDARD)	10153385	10061128	454231	816654
SKULLGARD CAP (LARGE)	10126693	—	468096	—
SUPER-V CAP (STANDARD)	10126683	—	—	—
VANGUARD CAP (STANDARD)	10153386	—	—	—
COMFO-CAP (STANDARD)	10153385	10061128	454231	—

¹Swing ratchet size is 6 1/2" through 7 1/2"

The new **Fas-Trac III sweatband** accessory helps keep workers cool and dry.

FAS-TRAC III SWEATBAND ACCESSORY	Part No.	Product Specifics
	10153518	<ul style="list-style-type: none"> • For use with MSA Fas-Trac® III Suspension • Optional, moisture-wicking and washable • Can be attached/replaced while suspension is assembled in helmet • Sold ONLY in packages of 10

⚠ WARNING

Use only the indicated MSA suspension in your MSA helmet. Do not mix suspension sizes and helmet sizes (i.e., putting a standard sized suspension in a large helmet or any other mismatched combination). Do not use competitor suspensions in MSA helmets. Inspect your suspension frequently. Suspensions should be replaced every 12 months, regardless of inspection results. Replace immediately (along with the helmet), if an impact has occurred. Failure to follow these instructions will reduce the energy absorbing ability of the protective helmet to receive impact, and could result in serious injury or death.

Helmet Customization

Put your reputation on ours: add your company logo, slogan or even a picture to your MSA helmet!

MSA offers 14 different helmets (in up to 20 colors), 4 suspensions, 27+ striping options, 21 stock logos/slogans, and multiple logo locations for endless customized helmet possibilities! We've been logoing hard hats for 30 years—longer than anyone else in the business!

Custom Logos

All logos are submitted to MSA Logo Express® Service design team by a MSA distributor. Logo Express Service artists then send an approval form that includes a FREE rendering of the selected hard hat. Once we receive written approval, we get started on the order!


Striping

Add any of 27+ different reflective and retro-reflective stripes¹ to your helmet. MSA reflective stripes help enhance the visibility of workers in daytime conditions, while retro-reflective stripes offer additional enhancement in nighttime or low-light conditions. Stripes are available in various sizes and shapes, and can be placed on all types of MSA helmets.

Minimum Order Quantities (MOQ)

MSA requires MOQs, by helmet type, for logoing and striping. Qualifying MOQs of custom-imprinted or striped helmets must be of the same size, model and options (i.e., color and suspension). MOQs are:

- 20 for V-Gard, V-Gard 500, V-Gard GREEN, SmoothDome, Topgard and Comfo Cap Helmets
- 16 for Skullgard or Thermalgard Helmets
- 12 for Super-V and Vanguard Helmets
- 40 for Bump Caps

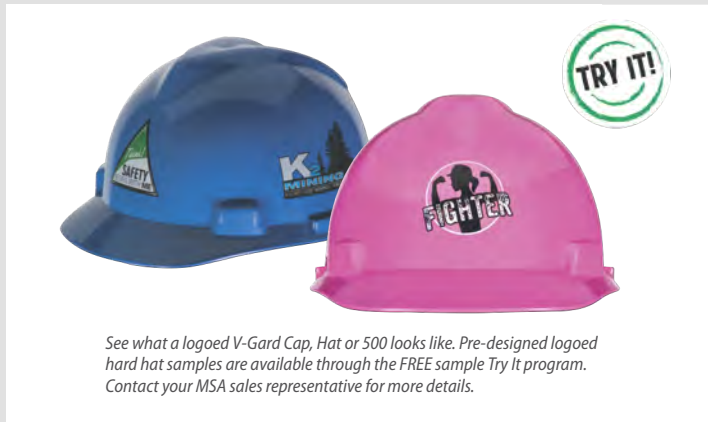

Placing Customized Helmet Orders

In three easy steps, you can get your first order of new logos and/or striping:

1. Complete all sections on the MSA Logo Express Order Form (ID 0617-01 MC).
2. See "Artwork Guidelines" (ID 0617-06-MC) for details on artwork submission.
3. Submit an electronic file of your artwork by email (Logo.Express@msasafety.com) or by US Postal Service (MSA Logo Express, 3880 Meadowbrook Rd., Murrysville, PA 15668-1753). Be sure to include a copy of the completed Order Form with your artwork submission.



Questions about Helmet Customization?

Contact your MSA distributor or MSA Logo Express.


EMAIL: Logo.Express@msasafety.com

PHONE: 1-800-MSA-LOGO (1-800-672-5646)

ADDRESS: MSA Logo Express
3880 Meadowbrook Rd.
Murrysville, PA 15668-1753

You can also visit us on the web:
us.msasafety.com/logoexpress
KEYWORD: Logo



The "Try It" sample program offers 100+ leading MSA Head, Eye, Face and Hearing Protection products, including V-Gard Helmets, V-Gard Accessories, left/RIGHT earmuffs, and Sightgard® eyewear—completely FREE of charge! Look for the  that tells you which products are in the program.

¹Most of our retro-reflective stripes meet the Type II requirements under ASTM D4956. ASTM D4956 is the specification for flexible, non-exposed glass bead lens and microprismatic, retroreflective sheeting designed for use on traffic control signs and other devices.









Thermalgard® Protective Caps

- Classification:** Type I
- Application:** General purpose; elevated temperature¹
- Shell Material:** Glass-reinforced Nylon
- Available Styles:** Slotted Cap
 - Sizes:** Standard (6½ – 8")
 - Standards:** ANSI/ISEA Z89.1-2009 (Class G); CSA Z94.1-2005 (Class G)
 - Certification:** Third-party by SEI
 - Customization:** Imprinting and striping available (*see page 7*)



Thermalgard
with Fas-Trac III
Suspension

Replacement Suspensions: See page 6

DESCRIPTION	Thermalgard Slotted Cap (standard size)		
		w/ 1-Touch Suspension	w/ Fas-Trac III Suspension
YELLOW		486964	486959
WHITE		486965	486960
RED		—	486961
ORANGE		486967	486962
BLUE		486968	486963
BRIGHT ORANGE		800359	800360
GREEN		487399	814343
STEEL GRAY		—	10095325



NFPA 70E is a work practice; it is not a standard and does not specify any test methods. No products "meet" NFPA 70E—the user simply follows the practice of NFPA 70E. When it comes to head protection, NFPA 70E recommends that a user wear a Class E hard hat in order to follow this work practice.

¹Thermalgard Caps can withstand radiant heat loads up to but not exceeding 350°F.

Topgard® Protective Caps and Hats

- Classification:** Type I
- Application:** General purpose; elevated temperature¹
- Shell Material:** Polycarbonate
- Available Styles:** Slotted Cap; Non-Slotted Full-Brim Hat
- Sizes:** Standard (6½ – 8")
- Standards:** ANSI/ISEA Z89.1-2009 (Class E); CSA Z94.1-2005 (Class E)
- Certification:** Third-party by SEI
- Customization:** Imprinting and striping available (*see page 7*)



Replacement Suspensions: See page 6

DESCRIPTION	Topgard Slotted Cap (standard size)		Topgard Non-Slotted Full-Brim Hat (standard size)		
		w/ 1-Touch Suspension	w/ Fas-Trac III Suspension	w/ 1-Touch Suspension	w/ Fas-Trac III Suspension
WHITE		454728	475385	454719	475393
YELLOW		454721	475378	454712	475387
GRAY		454722	475379	454713	—
BLUE		454723	475380	—	—
ORANGE		454725	475382	—	—
GREEN		454726	475383	—	—
RED		454727	475384	—	—
BRIGHT ORANGE		—	804396	—	804397
WHITE W/LAMP BRACKET AND CORD HOLDER		448914	—	—	—

¹Topgard Caps and Hats can withstand radiant heat loads up to but not exceeding 275°F.

Skullgard® Protective Caps and Hats

Classification: Type I

Application: General purpose; elevated temperature¹

Shell Material: Phenolic

Available Styles: Non-Slotted Cap and Full-Brim Hat

Sizes: **Cap:** Standard (6½ – 8"); Large (7 – 8½") **Hat:** Standard (6½ – 8")

Standards: ANSI/ISEA Z89.1-2009 (Class G)










Certification: Third-party by SEI

Customization: Imprinting and striping available (*see page 7*)

Replacement Suspensions: See page 6



Skullgard, natural,
with Fas-Trac III
Suspension

DESCRIPTION		Skullgard Cap (standard size)			Skullgard Full-Brim Hat (standard size)	
		w/ Staz-On Suspension	w/ Fas-Trac III Suspension	w/ Swing-Ratchet Suspension	w/ Staz-On Suspension	w/ Fas-Trac III Suspension
NATURAL TAN		454617	475395	816651	454664	475407
WHITE		454618	475396	—	454665	475408
YELLOW		454619	475397	—	454666	—
RED		454620	—	—	—	—
GREEN		454621	—	—	454668	—
GRAY		454622	—	—	—	—
BLUE		454623	—	—	—	—
ORANGE		454626	—	—	454673	—
HI-VIZ RED-ORANGE ²		458702	—	—	—	—
DESCRIPTION	Skullgard Cap (standard size)		Skullgard Full-Brim Hat (standard size)			
	w/ Staz-On Suspension	w/ Fas-Trac III Suspension	w/ Staz-On Suspension			
NATURAL TAN W/LAMP BRACKET AND CORD HOLDER	460409	—	460389			
NATURAL TAN W/ WELDER'S LUGS	—	482002	—			


¹Skullgard Caps and Hats can withstand radiant heat loads up to but not exceeding 350°F.

²Skullgard Cap meets the voluntary standard for hi-visibility as prescribed by ANSI/ISEA Z89.1-2009. Look for the official hi-visibility marking [HV] on the helmet's ANSI label.


V-Gard Headgear

V-Gard Headgear can be used for face protection when head protection is not required. V-Gard Headgear is available in two versions: General Purpose and Elevated Temperature (Extended). V-Gard Headgear are designed and approved for use with V-Gard Visors.¹

Classification:	General purpose
Market(s):	General industry, manufacturing, repair and maintenance, construction, oil and gas, forestry, shipbuilding, metalworking, automotive, mining, chemical industries
Application(s):	Chipping, splash, chiseling, drilling, grinding, machining, power fastening, sanding, sawing, laboratory
Material:	High density polyethylene (HDPE)
Color(s):	Black
Available Styles:	Ratchet closure
Size:	Standard (6½ – 8)
Standards²:	ANSI/ISEA Z87.1-2010; EN 166; CSA Z94.3; and AS/NZS 1337
Certification:	Third-party by Intertek, INSPEC International Ltd., CSA International and SAI Global Ltd.
Min Order Qty:	10

V-GARD HEADGEAR FOR GENERAL PURPOSE	Part No.	Product Specifics
	10127061	<ul style="list-style-type: none"> • Patent-pending, Infini-just lift/closure with grippable knobs that don't come off; no parts to lose! • Replaceable, sweat-wicking, cushioned headband helps keep workers dry and cool • Sweat-wicking ratchet cover keeps nape comfortable • For use ONLY with V-Gard Visors; not for use where head protection is required • All non-metal construction • Available in a kit with PC, Clear, General Purpose Contoured Visor

Classification:	Elevated temperature
Market(s):	Food manufacturing/canneries, steel mills, construction, open-pit mining, agriculture, oil/gas/petrochemical refineries, rubber manufacturing, and steam tunnels
Application(s):	Food processing, machine operation, maintenance, millwright, cutting, punching, extrusion, drilling, blasting; casting/conveying, chemical mixing, sanding
Material:	Heat-Resistant Nylon
Color(s):	Grey
Available Styles:	Ratchet closure
Size:	Standard (6½ – 8)
Standards²:	ANSI/ISEA Z87.1-2010; EN 166; CSA Z94.3; and AS/NZS 1337
Certification:	Third-party by Intertek, INSPEC International Ltd., CSA International and SAI Global Ltd.
Min Order Qty:	5

V-GARD HEADGEAR FOR ELEVATED TEMPERATURES	Part No.	Product Specifics
	10127062	<ul style="list-style-type: none"> • Extended browguard for additional coverage in high temperatures • Tested to withstand temperatures up to 400°F³ • Patent-pending, Infini-just lift/closure with grippable knobs that don't come off; no parts to lose! • Replaceable, sweat-wicking, cushioned headband helps keep workers dry and cool • Sweat-wicking ratchet cover keeps nape comfortable • For use ONLY with V-Gard Visors; not for use where head protection is required • All non-metal construction • Available in a kit with PC, Green Tint, Reflective-Coated Visor

¹ DO NOT use V-Gard Headgear with V-Gard Arc Visors tested to ASTM F2178-2008 Test Method (ref. NFPA 70E-2012, Hazard Risk Category). These visors are designated for use with specified V-Gard Frames and MSA helmet ONLY as face protection for workers exposed to high voltage electric arcs. V-Gard Headgear has not been tested or certified to the Test Method, and should not be used for this type of Arc Flash protection.









² Standards requirements met by each V-Gard Frame or Headgear/V-Gard Visor combination designated on each V-Gard Visor.

³ Exposure to extreme heat can cause thermal discomfort. Proper precautions should be taken to prevent heat stress and other injuries.

V-Gard Accessory System: V-Gard Frames for Caps

The V-Gard Accessory System offers helmet-mounted frames for various work conditions and MSA helmets. The sloped design allows liquids, chips and other materials to slide off the frame and away from the line of sight. Each frame, whether used with or without debris control, meets the applicable requirements for ANSI/ISEA Z87.1-2010, EN 166, CSA Z94.3, AS/NZS 1337, and many local standards.¹

Classification:	General purpose
Market(s):	General industry, manufacturing, repair and maintenance, construction, oil and gas, forestry, shipbuilding, metalworking, automotive, mining
Application(s):	Chipping, splash, chiseling, drilling, grinding, machining, power fastening, sanding, sawing
Material:	High density polyethylene (HDPE)
Color(s):	Black
Available Styles:	Frame for Slotted Caps Universal Frame for Caps
Size:	Fits MSA Safety Caps
Features:	Offered with or without debris control
Standards¹:	ANSI/ISEA Z87.1-2010; EN 166; CSA Z94.3; and AS/NZS 1337
Certification:	Third-party by Intertek, INSPEC International Ltd., CSA International and SAI Global Ltd.
Min Order Qty:	10

V-GARD FRAMES FOR GENERAL PURPOSES	Part No.	Product Specifics
	10115730 	<ul style="list-style-type: none"> Fits all MSA Slotted Caps Sold with replaceable debris control which creates tight seal between frame and cap Stowable slot adaptors secure frame tightly in slotted MSA caps, and allow frame to work with or without earmuffs² Sliding adjustment blades allow visor to work with most half-mask respirators and other PPE worn under a visor
	10121266 	<ul style="list-style-type: none"> Fits all MSA Slotted Caps³ Debris control sold separately Stowable slot adaptors secure frame tightly in slotted MSA caps, and allow frame to work with or without earmuffs² Sliding adjustment blades allow visor to work with most half-mask respirators and other PPE worn under a visor
	10115822 	<ul style="list-style-type: none"> Fits all MSA Caps (Slotted or Non-Slotted)⁴ Sold with replaceable debris control which creates tight seal between frame and cap Heavy duty flat rubber strap allows easy and secure placement on all MSA caps, including non-slotted models Design allows use with other PPE, including MSA earmuffs and respirators
	10121268 	<ul style="list-style-type: none"> Fits all MSA Caps (Slotted or Non-Slotted)⁴ Debris control sold separately Heavy duty flat rubber strap allows easy and secure placement on all MSA caps, including non-slotted models Design allows use with other PPE, including MSA earmuffs and respirators

WARNING

Use V-Gard Frames ONLY with V-Gard Visors, to ensure compliance with safety standards. Misuse can result in death, permanent impairment of sight, or other serious injury.

¹Standards requirements met by each V-Gard Frame or Headgear/V-Gard Visor combination designated on each V-Gard Visor.

²Patent pending.

³MSA recommends the use of debris control on V-Gard frames when wearing BOTH large V-Gard molded Visors and cap-mounted earmuffs.

⁴MSA does not recommend the use of the V-Gard Universal Frame with the MSA SmoothDome when using cap-mounted muffs and large V-Gard molded Visors. The V-Gard Frame for Slotted Caps should be worn with this particular combination.

V-Gard Accessory System: V-Gard Elevated Temperature Frames for Caps

- Classification:** Elevated temperature
- Market(s):** Food manufacturing/canneries, steel mills, construction, open-pit mining, agriculture, oil/gas/petrochemical refineries, rubber manufacturing, and steam tunnels
- Application(s):** Food processing, machine operation, maintenance, millwright, cutting, punching, extrusion, drilling, blasting, casting/conveying, chemical mixing, sanding
- Material:** Heat-Resistant Nylon
- Color(s):** Grey
- Available Styles:** Frame for Slotted Caps
Universal Frame for Caps
- Size:** Fits MSA Safety Caps
- Features:** Offered with or without debris control
Tested to withstand temperatures of 350°F (176.7°C), reducing warping, cracking or crazing
All non-metal construction
- Standards¹:** ANSI/ISEA Z87.1-2010; EN 166; CSA Z94.3; and AS/NZS 1337
- Certification:** Third-party by Intertek, INSPEC International Ltd., CSA International and SAI Global Ltd.
- Min Order Qty:** 10

V-GARD FRAMES FOR ELEVATED TEMPERATURE APPLICATIONS		Part No.	Product Specifics
		10115821 	<ul style="list-style-type: none"> • Stowable slot adaptors secure frame tightly in slotted MSA caps, and allow frame to work with or without earmuffs² • Sliding adjustment blades allow visor to work with most half-mask respirators and other PPE worn under a visor • Replaceable debris control tested against EN 166 hot solids requirements
		10121267 	<ul style="list-style-type: none"> • Stowable slot adaptors secure frame tightly in slotted MSA caps, and allow frame to work with or without earmuffs • Sliding adjustment blades allow visor to work with most half-mask respirators and other PPE worn under a visor • Debris control sold separately³
		10116552 	<ul style="list-style-type: none"> • Heavy duty flat rubber strap allows easy and secure placement on all MSA caps, including non-slotted models⁴ • Design allows use with other PPE, including MSA earmuffs and respirators • Replaceable debris control tested against EN 166 hot solids requirements
		10124426 	<ul style="list-style-type: none"> • Heavy duty flat rubber strap allows easy and secure placement on all MSA caps, including non-slotted models⁴ • Design allows use with other PPE, including MSA earmuffs and respirators • Debris control sold separately³

¹Standards requirements met by each V-Gard Frame or Headgear/V-Gard Visor combination designated on each V-Gard Visor.



²Patent pending.

³MSA recommends the use of debris control on V-Gard frames when wearing BOTH large V-Gard molded Visors and cap-mounted earmuffs.



⁴MSA does not recommend the use of the V-Gard Universal Frame with the MSA SmoothDome when using cap-mounted muffs and large V-Gard molded Visors. The V-Gard Frame for Slotted Caps should be worn with this particular combination.

V-Gard Accessory System: V-Gard Frames for Full-Brim Helmets

Classification:	General purpose
Market(s):	General industry, manufacturing, repair and maintenance, construction, oil and gas, forestry, shipbuilding, metalworking, automotive, mining
Application(s):	Chipping, splash, chiseling, drilling, grinding, machining, power fastening, sanding, sawing
Material:	High density polyethylene (HDPE)
Color(s):	Black
Available Styles:	Universal Frame
Size:	Fits MSA Full-Brim Safety Helmets
Features:	Offered without debris control ONLY
Standards¹:	ANSI/ISEA Z87.1-2010; CSA Z94.3; and AS/NZS 1337
Certification:	Third-party by Intertek, INSPEC International Ltd., CSA International and SAI Global Ltd.
Min Order Qty:	10

V-GARD FRAME FOR FULL-BRIM HELMETS FOR GENERAL PURPOSE		Part No.	Product Specifics
		10116627	<ul style="list-style-type: none"> • Heavy duty flat rubber strap allows easy and secure placement on all MSA caps, including non-slotted models • Design allows use with other PPE, including MSA earmuffs and respirators

Classification:	Elevated temperature
Market(s):	Food manufacturing/canneries, steel mills, construction, open-pit mining, agriculture, oil/gas/petrochemical refineries, rubber manufacturing, and steam tunnels
Application(s):	Food processing, machine operation, maintenance, millwright, cutting, punching, extrusion, drilling, blasting, casting/conveying, chemical mixing, sanding
Material:	Polycarbonate
Color(s):	Grey
Available Styles:	Universal Frame
Size:	Fits MSA Full-Brim Safety Helmets
Features:	Offered without debris control ONLY Tested to temperatures of 350°F (176.7°C), reducing warping, cracking or crazing All non-metal construction
Standards¹:	ANSI/ISEA Z87.1-2010; CSA Z94.3; and AS/NZS 1337
Certification:	Third-party by Intertek, INSPEC International Ltd., CSA International and SAI Global Ltd.
Min Order Qty:	10

V-GARD FRAME FOR FULL-BRIM HELMETS FOR ELEVATED TEMPERATURE APPLICATIONS		Part No.	Product Specifics
		10116628	<ul style="list-style-type: none"> • Heavy duty flat rubber strap allows easy and secure placement on all MSA caps, including non-slotted models • Design allows use with other PPE, including MSA earmuffs and respirators

¹Standards requirements met by each V-Gard Frame/V-Gard Visor combination designated on each V-Gard Visor.

V-Gard Accessory System: V-Gard Metal Frames

- Classification:** General purpose
- Market(s):** Manufacturing; construction; steel/smelting operations
- Application(s):** Machine operation, maintenance, millwright, extrusion, drilling, blasting, casting/conveying
- Material:** Anodized aluminum
- Color(s):** Silver
- Available Styles:** Universal (spring coil)
- Size:** For MSA Caps, MSA Skullgard Caps and MSA Full Brim Hats (as indicated)
- Features:**
- Works with V-Gard Visors
 - Spring coil for fast loading of frame to helmet
 - Three visor resting positions
 - Locking device holds visor securely in the down position
 - Heavy duty anodized aluminum frame for tough work environments
- Standards:** ANSI/ISEA Z87.1-2010
- Certification:** Third-party by Intertek















V-GARD METAL FRAMES	Part No.	Product Specifics
	10158799	• For use with MSA Caps
	10158800	• For use with MSA Skullgard Caps
	10158821	• For use with MSA Full Brim Hats

⚠ CAUTION

MSA does not recommend V-Gard Metal Frames for use where electrical hazards, including but not limited to arc flash, could occur.

V-Gard Visors: General Purpose

Classification:	General purpose
Market(s):	General industry, manufacturing, repair and maintenance, construction, oil and gas, forestry, shipbuilding, metalworking, automotive, mining
Application(s):	Chipping, splash, chiseling, drilling, grinding, machining, power fastening, sanding, sawing
Material:	Polycarbonate
Color(s):	Clear
Available Styles:	Contoured or flat; visors and nitrometers; bulk pack
Size:	Varies; see "Product Specifics" in Ordering Information chart
Features:	Maximum UV protection ("U6") Impact-rated (Z87+)
Standards¹:	ANSI/ISEA Z87.1-2010; CSA Z94.3 and EN 166 (2C-1.2 MSA 1B); AS/NZS 1337, except as noted
Certification:	Third-party by Intertek, INSPEC International Ltd., CSA International and SAI Global Ltd.
Min Order Qty:	10

V-GARD VISORS FOR GENERAL PURPOSE APPLICATIONS		Part No.	Product Specifics
		10144486 	<ul style="list-style-type: none"> • 5.5" (14.61 cm) x 17" (43.2 cm) x .04" (1.02mm) • Nitrometer; for use with V-Gard Retractable or Standard Chin Protectors • Contoured visor; closer fit and improved resistance to impact and splash hazards • Approved to ANSI and CSA² Standards; does not meet EN standards.
		10115836 	<ul style="list-style-type: none"> • 8" (20.3 cm) x 17" (43.2 cm) x .04" (1.02mm) • Contoured visor; closer fit and improved resistance to impact and splash hazards
		10115837 	<ul style="list-style-type: none"> • 8" (20.3 cm) x 17" (43.2 cm) x .04" (1.02mm) • Nitrometer; for use with V-Gard Retractable or Standard Chin Protectors • Contoured visor; closer fit and improved resistance to impact and splash hazards
		10120108 	<ul style="list-style-type: none"> • 8" (20.3 cm) x 17" (43.2 cm) x .04" (1.02mm) • Bulk pack of 20 • Contoured visor; closer fit and improved resistance to impact and splash hazards
		10115863 	<ul style="list-style-type: none"> • 9.5" (24.1 cm) x 17" (43.2 cm) x .04" (1.02mm) • Contoured visor; closer fit and improved resistance to impact and splash hazards

¹Standards requirements met by each V-Gard Frame or Headgear/V-Gard Visor combination designated on each V-Gard Visor.
²PN 10144486 must be worn with a V-Gard Chin Protector to comply with CSA coverage requirements.

V-Gard Visors: General Purpose with Anti-fog/Anti-scratch Coatings

Classification:	General purpose: humid conditions
Market(s):	General industry, manufacturing, repair and maintenance, construction, oil and gas, forestry, shipbuilding, metalworking, automotive, mining
Application(s):	Hot/humid conditions, chipping, splash, chiseling, drilling, grinding, machining, power fastening, sanding, sawing
Material:	Polycarbonate with anti-fog/anti-scratch coatings
Color(s):	Clear Green tint
Available Styles:	Contoured; visors and nitrometers
Size:	8" (20.3 cm) x17" (43.2 cm) x .06" (1.52mm)
Features:	Anti-fog/anti-scratch coatings Impact-rated (Z87+) Maximum UV protection ("U6") Slightly thicker for industrial impact applications
Standards¹:	ANSI/ISEA Z87.1-2010 and CSA Z94.3
Certification:	Third-party by Intertek and CSA International
Min Order Qty:	5

V-GARD VISORS FOR GENERAL PURPOSE APPLICATIONS	Part No.	Product Specifics
 	10115839 	• Contoured visor; closer fit and improved resistance to impact and splash hazards
 	10115841 	• Nitrometer; for use with V-Gard Retractable or Standard Chin Protectors • Contoured visor; closer fit and improved resistance to impact and splash hazards
 	10115842 	• Contoured visor; closer fit and improved resistance to impact and splash hazards • Green tint, reduces glare. Not for use where a Shade infrared (IR) radiation visor is required.
 	10115843 	• Nitrometer; for use with V-Gard Retractable or Standard Chin Protectors • Contoured visor; closer fit and improved resistance to impact and splash hazards • Green tint, reduces glare. Not for use where a Shade IR visor is required.








All V-Gard polycarbonate clear and green tinted visors, as well as green tint propionate offer maximum UV protection as measured under ANSI/ISEA Z87.1-2010. Just look for the "U6" marking.

¹Standards requirements met by each V-Gard Frame or Headgear/V-Gard Visor combination designated on each V-Gard Visor.

V-Gard Visors: General Purpose

Classification:	General purpose
Market(s):	General industry, manufacturing, repair and maintenance, construction, oil and gas, forestry, shipbuilding, metalworking, automotive, mining
Application(s):	Chipping, splash, chiseling, drilling, grinding, machining, power fastening, sanding, sawing
Material:	Polycarbonate
Color(s):	Clear
Available Styles:	Contoured or flat; visors and nitrometers
Size:	8" (20.3 cm) x17" (43.2 cm) x .06" (1.52mm)
Features:	Impact-rated (Z87+) Maximum UV protection ("U6") Slightly thicker for industrial impact applications
Standards¹:	ANSI/ISEA Z87.1-2010; EN 166 (2C-1.2 MSA 1B389); CSA Z94.3 and AS/NZS 1337
Certification:	Third-party by Intertek, INSPEC International Ltd., CSA International and SAI Global Ltd.
Min Order Qty:	10

V-GARD VISORS FOR GENERAL PURPOSE APPLICATIONS		Part No.	Product Specifics
 		10115840 	<ul style="list-style-type: none"> Contoured visor; closer fit and improved resistance to impact and splash hazards
 		10117783	<ul style="list-style-type: none"> Flat nitrometer; for use with V-Gard Retractable or Standard Chin Protectors Wider design improved resistance to impact and splash hazards Does not meet CSA Z94.3



Only eye/face products marked as Z87+ are impact-rated. The "+" indicates the impact rating. Product literature can be vague, indicating that eye/face products "meet the requirements" of ANSI Z87. If you need a Z87 impact-rated product, be sure to ask the manufacturer if it is marked with "Z87+".

¹Standards requirements met by each V-Gard Frame or Headgear/V-Gard Visor combination designated on each V-Gard Visor.

V-Gard Visors: Heavy Duty with High-Performance Anti-fog/Anti-scratch Coatings

- Classification:** General purpose: heavy duty, humid conditions
- Market(s):** General industry, manufacturing, repair and maintenance, construction, oil and gas, forestry, shipbuilding, metalworking, automotive, mining
- Application(s):** Hot/humid conditions, chipping, splash, chiseling, drilling, grinding, machining, power fastening, sanding, sawing, outdoor work
- Material:** Polycarbonate, with EN166-performance-rated anti-fog/anti-scratch coatings
- Color(s):** Clear
Green tint
- Available Styles:** Molded
- Size:** 10.375" (26.4 cm) x 17" (43.2 cm) x .098" (2.5 mm)
- Features:** EN 166 performance-rated anti-fog/anti-scratch (N, K marks, respectively)
Impact-rated (Z87+)
Maximum UV protection ("U6")
Thick for heavy duty industrial impact applications
- Standards¹:** ANSI/ISEA Z87.1-2010; EN 166 ((2C-1.2 MSA 1BT389KN [clear] and 2.2 MSA 1BT39KN [green tint])); CSA Z94.3 and AS/NZS 1337
- Certification:** Third-party by Intertek, INSPEC International Ltd., CSA International and SAI Global Ltd.
- Min Order Qty:** 5

V-GARD VISORS FOR HEAVY DUTY GENERAL PURPOSE APPLICATIONS		Part No.	Product Specifics
 		10115853 	<ul style="list-style-type: none"> Molded visor for superior optics under heavy duty use Extended length for greater coverage of neck/face Performs well against many chemicals; please refer to MSA's Chemical Application Quick Reference Guide (ID 0670-007/MC) for details
 		10115854 	<ul style="list-style-type: none"> Molded visor for superior optics under heavy duty use Extended length for greater coverage of neck/face Green tint, helps reduce glare; not for use where a Shade IR visor is required



V-Gard molded, green and clear visors (whether polycarbonate or polycarbonate) offer superior optical quality and resistance to many chemicals. For details on optics, please refer to the MSA White Paper, "Optical Quality Requirements and V-Gard® Visors" (ID 0302-32 MC) available for download on MSAsafety.com.

¹Standards requirements met by each V-Gard Frame or Headgear/V-Gard Visor combination designated on each V-Gard Visor.

V-Gard Visors: General Purpose (Non-Impact)





Classification:	General purpose: non-impact
Market(s):	General industry, manufacturing, repair and maintenance, construction, oil and gas, forestry, shipbuilding, automotive, mining
Application(s):	Flying chips and other light debris
Material:	Epoxy-coated steel mesh (20 x 20)
Color(s):	Black Aluminum
Available Styles:	Flat
Size:	Varies; see "Product Specifics" in Ordering Information chart
Features:	General protector (Z87); not for impact hazards
Standards¹:	ANSI/ISEA Z87.1-2010; EN 1731-F; and AS/NZS 1337
Certification:	Third-party by Intertek, INSPEC International Ltd., and SAI Global Ltd.
Min Order Qty:	10

V-GARD VISORS FOR GENERAL PURPOSE APPLICATIONS		Part No.	Product Specifics
		10116557	<ul style="list-style-type: none"> • 8" (20.3 cm) x 17" (43.2 cm) • Visor; plastic-edged mesh • Not for use against splash, impact, elevated temperatures or UV hazards • Can be worn with earmuffs
		10116558	<ul style="list-style-type: none"> • 8" (20.3 cm) x 17" (43.2 cm) • Nitrometer; for use with V-Gard Retractable or Standard Chin Protectors • Plastic-edged mesh • Not for use against splash, impact, elevated temperatures or UV hazards • Can be worn with earmuffs
		10116556	<ul style="list-style-type: none"> • 8" (20.3 cm) x 16.5" (41.9 cm) • Aluminum-bound mesh • Not for use against splash, impact, electrical or UV hazards

¹Standards requirements met by each V-Gard Frame or Headgear/V-Gard Visor combination designated on each V-Gard Visor.

V-Gard Visors: Heavy Duty Chemical and Splash

Classification:	Chemical and splash: Heavy Duty
Market(s):	General industry, heavy manufacturing, laboratories, chem/petrochemical, agriculture, pharmaceutical, oil and gas, mining
Application(s):	Chipping, splash, chemical mixing, grinding, machining, power fastening, sanding, sawing
Material:	Propionate
Color(s):	Clear
Available Styles:	Molded visor; molded nitrometer
Size:	Varies.; see "Product Specifics" in Ordering Information chart
Features:	Performs well against many types of chemicals. Please refer to MSA's Chemical Application Quick Reference Guide (ID 0670-007/MC) for details Impact-rated (Z87+)
Standards¹:	ANSI/ISEA Z87.1-2010; EN 166 (MSA 1B 3); CSA Z94.3 and AS/NZS 1337
Certification:	Third-party by Intertek, INSPEC International Ltd., CSA International and SAI Global Ltd.
Min Order Qty:	5

V-GARD VISORS FOR CHEMICAL AND SPLASH APPLICATIONS	Part No.	Product Specifics
	10115855 	<ul style="list-style-type: none"> • 8" (20.3 cm) x17" (43.2 cm) x .098" (2.5mm) • Visor • Extra-thick to help prevent warping, cracking or crazing under tough conditions
	10115856 	<ul style="list-style-type: none"> • 8" (20.3 cm) x17" (43.2 cm) x .098" (2.5mm) • Nitrometer; for use with V-Gard Retractable or Standard Chin Protectors • Extra-thick to help prevent warping, cracking or crazing under tough conditions
	10115851 	<ul style="list-style-type: none"> • 9.25" (23.5 cm) x18" (45.7 cm) x .098" (2.5mm) • Visor • Extra-thick to help prevent warping, cracking or crazing under tough conditions • Extended length and width for greater coverage of neck and face



V-Gard propionate visors offer both chemical resistance and impact protection, unlike most propionate visors on the market. Not only are they marked with Z87+, but the clear visors are also compliant with EN166, meaning they were tested at a velocity nearly 32% faster than ANSI/ISEA Z87.1-2010. V-Gard green tint propionate Visors also offer maximum UV protection.

¹Standards requirements met by each V-Gard Frame or Headgear/V-Gard Visor combination designated on each V-Gard Visor.







V-Gard Visors: Heavy Duty Chemical and Splash (Tinted)

Classification:	Chemical and splash: Heavy Duty
Market(s):	General industry, heavy manufacturing, laboratories, chem/petrochemical, agriculture, pharmaceutical, oil and gas, mining
Application(s):	Outdoor use, chipping, splash, chemical mixing, grinding, machining, sanding, sawing
Material:	Propionate
Color(s):	Green tint
Available Styles:	Molded
Size:	Varies; see "Product Specifics" in Ordering Information chart
Features:	Maximum UV protection ("U6") Impact-rated (Z87+) Green tint helps alleviate eyestrain and reduces glare
Standards¹:	ANSI/ISEA Z87.1-2010 and CSA Z94.3
Certification:	Third-party by Intertek and CSA International
Min Order Qty:	5

V-GARD VISORS FOR CHEMICAL AND SPLASH APPLICATIONS		Part No.	Product Specifics
		10115857 	<ul style="list-style-type: none"> • 8" (20.3 cm) x 17" (43.2 cm) x .098" (2.5mm) • Visor • Glare-reducing green tint alleviates eye strain and fatigue; not for use where a Shade IR visor is required • Extra-thick to help prevent warping, cracking or crazing under tough conditions
		10115852 	<ul style="list-style-type: none"> • 9.25" (23.5 cm) x 18" (45.7 cm) x .098" (2.5mm) • Visor • Glare-reducing green tint alleviates eye strain and fatigue; not for use where a Shade IR visor is required • Extra-thick to help prevent warping, cracking or crazing under tough conditions • Extended length and width for greater coverage of neck and face

V-Gard Visors: Elevated Temperature with High Performance Anti-fog/Anti-scratch Coatings

- Classification:** Elevated temperature: Heavy Duty
- Market(s):** Food manufacturing/canneries, steel mills, construction, open-pit mining, agriculture, oil/gas/petrochemical refineries, rubber manufacturing, steam tunnels
- Application(s):** Food processing, machine operation, maintenance, millwright, cutting, punching, extrusion, drilling, blasting, casting/conveying, chemical mixing, sanding
- Material:** Polycarbonate with EN166 performance-rated anti-fog/anti-scratch coatings
- Color(s):** Clear
- Available Styles:** Molded
- Size:** Varies; see "Product Specifics" in Ordering Information chart
- Features:** EN166 performance-rated anti-fog/anti-scratch coatings (N, K marks, respectively)
Impact-rated (Z87+)
Maximum UV protection ("U6")
Not for protection against radiant heat or IR hazards.
- Standards¹:** ANSI/ISEA Z87.1-2010; EN 166 (2C-1.2 MSA 1BT389KN); CSA Z94.3 and AS/NZS 1337
- Certification:** Third-party by Intertek, INSPEC International Ltd., CSA International and SAI Global Ltd.
- Min Order Qty:** 5

V-GARD VISORS FOR ELEVATED TEMPERATURE APPLICATIONS		Part No.	Product Specifics
 		10115844 	<ul style="list-style-type: none"> • 9.25" (23.5 cm) x 17" (43.2 cm) x .098" (2.5mm) • Extra-thick visor helps prevent warping, cracking or crazing under tough conditions • Conditioned to a high of +131°F (and a low of -23°F) and then tested to the medium impact rating in the EN166 standard (higher impact speed than ANSI/ISEA Z87.1-2010) • Visors do not reflect IR; not recommended for use against radiant heat hazards
 		10115846 	<ul style="list-style-type: none"> • 9.25" (23.5 cm) x 18" (45.7 cm) x .098" (2.5mm) • Extra-thick visor helps prevent warping, cracking or crazing under tough conditions • Extended length for greater coverage of face and neck • Conditioned to a high of +131°F (and a low of -23°F) and then tested to the medium impact rating in the EN166 standard (higher impact speed than ANSI/ISEA Z87.1-2010) • Visors do not reflect IR; not recommended for use against radiant heat hazards



V-Gard molded clear and green tint Visors with anti-fog and anti-scratch coatings offer EN166 "N" and "K" markings, respectively, having passed strenuous testing to confirm performance levels.

¹Standards requirements met by each V-Gard Frame or Headgear/V-Gard Visor combination designated on each V-Gard Visor.

V-Gard Visors: Elevated Temperature with High Performance Anti-fog/Anti-scratch Coatings (Tinted)

Classification:	Elevated temperature: Heavy Duty
Market(s):	Construction, open-pit mining, agriculture, oil/gas/petrochemical refineries
Application(s):	Food processing, machine operation, maintenance, millwright, cutting, punching, extrusion, drilling, blasting, casting/conveying, chemical mixing, sanding
Material:	Polycarbonate
Color(s):	Green tint
Available Styles:	Molded
Size:	Varies; see "Product Specifics" in Ordering Information chart
Features:	EN166 performance-rated anti-fog/anti-scratch coatings (N, K marks, respectively) Impact-rated (Z87+) Green tint helps alleviate eyestrain and reduces glare Maximum UV protection ("U6") Not for protection against radiant heat or IR hazards.
Standards¹:	ANSI/ISEA Z87.1-2010; EN 166 (2.2 MSA 1BT39KN); CSA Z94.3 and AS/NZS 1337
Certification:	Third-party by Intertek, INSPEC International Ltd., CSA International and SAI Global Ltd.
Min Order Qty:	5

V-GARD VISORS FOR ELEVATED TEMPERATURE APPLICATIONS	Part No.	Product Specifics
	10115845 	<ul style="list-style-type: none"> • 9.25" (23.5 cm) x 17" (43.2 cm) x .098" (2.5mm) • Extra-thick visor helps prevent warping, cracking or crazing under tough conditions • Conditioned to a high of 131°F (and a low of -23°F) and then tested to the medium impact rating in the EN166 standard (higher impact speed than ANSI/ISEA Z87.1-2010) • Visors do not reflect IR; not recommended for use against radiant heat hazards • Not for use where a Shade IR visor is required
	10115849 	<ul style="list-style-type: none"> • 9.25" (23.5 cm) x 18" (45.7 cm) x .098" (2.5mm) • Extra-thick visor helps prevent warping, cracking or crazing under tough conditions • Extended length for greater coverage of face and neck • Conditioned to a high of 131°F (and a low of -23°F) and then tested to the medium impact rating in the EN166 standard (higher impact speed than ANSI/ISEA Z87.1-2010) • Visors do not reflect IR; not recommended for use against radiant heat hazards • Not for use where a Shade IR visor is required



Many people mistakenly believe that green tinted visors offer protection from infrared (IR) radiation. If you need a specific reduction in the transmittance level for IR, look for a visor with a "W" or "R" mark - these are generally known as "shade" visors. Reflectance is another way to reduce the IR transmittance through a lens. See also "V-Gard Visors: Radiant Heat/Elevated Temperature" for information about IR reflectance.

¹Standards requirements met by each V-Gard Frame or Headgear/V-Gard Visor combination designated on each V-Gard Visor.

V-Gard Visors: Radiant Heat/Elevated Temperature

Classification:	Radiant Heat/Elevated Temperature
Market(s):	Metal industries, glass manufacturing, iron and steel foundries, chemical manufacturing, construction, general manufacturing, textile manufacturing, mining, oil and gas
Application(s):	Grinding, pouring, casting, blowing/melting, rolling, sawing, cutting, crimping, millwrighting, machining/operating, pipelining, pulping
Material:	Polycarbonate
Color(s):	Clear, reflective-coated Green tint, reflective-coated
Available Styles:	Molded
Size:	9.5" (24.1 cm) x 17.75" (45.09 cm) x .07" (1.8 mm)
Features:	Reflects >60% Infrared (IR) radiation (EN166 "R" mark) in the 780nm to 2000nm wavelengths Impact-rated (Z87+) Maximum UV protection ("U6")
Standards¹:	ANSI/ISEA Z87.1-2010; EN 166 (2C-2.5 MSA 1BT3R [clear] and 2-4 MSA 1BT3R [green tint]); CSA Z94.3 and AS/NZS 1337
Certification:	Third-party by Intertek, INSPEC International Ltd., CSA International and SAI Global Ltd.
Min Order Qty:	5

V-GARD VISORS FOR ELEVATED TEMPERATURE/RADIANT HEAT APPLICATIONS		Part No.	Product Specifics
		10115848 	<ul style="list-style-type: none"> • Reflective coating reflects IR and helps dissipate heat • Thick visor helps prevent warping, cracking or crazing under tough conditions • Extended length for greater coverage of face and neck; DO NOT use for welding • Clear, reflective-coated
		10115850 	<ul style="list-style-type: none"> • Reflective coating reflects IR and helps dissipate heat • Green tint helps alleviate eyestrain and reduces glare; not for use where a Shade IR visor is required • Thick visor helps prevent warping, cracking or crazing under tough conditions • Extended length for greater coverage of face and neck; DO NOT use for welding • Green tint, reflective-coated










Reflective-coated visors offer protection from irradiance, or the electromagnetic radiation (EMR) energy created in elevated temperature environments. V-Gard Reflective Coated Visors offer an EN166 "R" mark. This means they have been certified to reflect >60% Infrared (IR) radiation in the 780 nm to 2000 nm wavelengths. V-Gard Reflective Visors have been shown to reduce temperatures behind the visor by several hundred degrees, and lower irradiance to below 0.1 kW/m². For details on V-Gard Reflective-Coated Visor performance, please see the MSA White Paper, "Radiant Heat Resistance" (ID 0670-020 MC) and "MSA V-Gard® Reflective-Coated Visors: Radiant Heat Resistance Simplified" (ID 0670-023 MC).

¹Standards requirements met by each V-Gard Frame or Headgear/V-Gard Visor combination designated on each V-Gard Visor.

V-Gard Visors: Welding (Shade 3 and Shade 5)


Classification:	Welding
Market(s):	Fabrication, steel mills, shipbuilding, construction, open-pit mining, agriculture, oil/gas/petrochemical refineries, rubber manufacturing
Application(s):	Welding, metal pouring, gas soldering, light cutting/brazing, manufacturing, impact and debris
Material:	Polycarbonate
Color(s):	Shade 3 IR, green Shade 5 IR, green
Available Styles:	Molded or Nitrometer
Size:	8" (20.3 cm) x 17" (43.2 cm) x .07" (1.8 mm)
Features:	Protection from IR, up to Shade 3 or 5 (as noted) Impact-rated (Z87+)
Standards¹:	ANSI/ISEA Z87.1-2010; EN 166 (4-3/3 MSA 1BT39 [shade 3] and 4-5/5 MSA 1BT39 [shade 5]); CSA Z94.3 and AS/NZS 1337
Certification:	Third-party by Intertek, INSPEC International Ltd., CSA International and SAI Global Ltd.
Min Order Qty:	5

V-GARD VISORS FOR WELDING APPLICATIONS		Part No.	Product Specifics
		10115859 	<ul style="list-style-type: none"> • Shade 3 IR • Visor • Thickness helps prevent pitting and warping from heat or weld spatter
		10115860 	<ul style="list-style-type: none"> • Shade 3 IR • Nitrometer; for use with V-Gard Retractable or Standard Chin Protectors • Thickness helps prevent pitting and warping from heat or weld spatter
		10115861 	<ul style="list-style-type: none"> • Shade 5 IR • Visor • Thickness helps prevent pitting and warping from heat or weld spatter
		10115862 	<ul style="list-style-type: none"> • Shade 5 IR • Nitrometer; for use with V-Gard Retractable or Standard Chin Protectors • Thickness helps prevent pitting and warping from heat or weld spatter


¹Standards requirements met by each V-Gard Frame or Headgear/V-Gard Visor combination designated on each V-Gard Visor.

V-Gard Visors: Arc Flash Application¹

Classification:	Arc
Market(s):	Manufacturing, utilities, construction, oil/gas/petrochemical
Application(s):	Maintenance, impact and debris, testing/repair
Material:	Polycarbonate
Color(s):	Special tint, light green
Available Styles:	Molded
Size:	9.25" (23.5 cm) x 18" (45.7 cm) x .065" (1.7 cm)
Features:	Rated to 12.9 cal/cm ² (see "Product Specifics" in table below) Impact-rated (Z87+)
Standards¹:	ANSI/ISEA Z87.1-2010 ASTM F2178-2008 (Ref: NFPA 70E, HRC 2)
Certification:	Third-party by Intertek and ArcWear
Min Order Qty:	5

V-GARD VISORS FOR ARC FLASH APPLICATIONS	Part No.	Product Specifics
	10115847	<ul style="list-style-type: none"> • Visor • Extended length and width for greater coverage of face and neck • Lightweight PC, offering high calorie rating • Rated to 12.9 cal/cm² when tested to ASTM F2178-2008 (ref. NFPA 70E-2012, Hazard Risk Category 2), and when worn with a V-Gard Hard Hat (PN 475358) and V-Gard Frame (PN 10121266) • Call MSA Customer Service (800-MSA-2222) for protection levels when using this V-Gard Arc Visor with other V-Gard Frames and MSA Helmet combinations







Classification:	Arc
Market(s):	Manufacturing, utilities, construction, oil/gas/petrochemical
Application(s):	Maintenance, impact and debris, testing/repair
Material:	Polycarbonate
Color(s):	Special tint, light green
Available Styles:	Molded nitrometer
Size:	8" (20.3 cm) x 17.25" (43.8 cm) x .065" (1.7 cm)
Features:	Rated to 11.3 cal/cm ² (see "Product Specifics" in table below) Impact-rated (Z87+)
Standards:	ANSI/ISEA Z87.1-2010 ASTM F2178-2008 (Ref: NFPA 70E, HRC 2)
Certification:	Third-party by Intertek and ArcWear
Min Order Qty:	5

V-GARD NITROMETER WITH CHIN PROTECTOR FOR ARC FLASH APPLICATIONS	Part No.	Product Specifics
	10118480	<ul style="list-style-type: none"> • Nitrometer; includes V-Gard Standard Chin Protector (required to achieve arc rating) that must be assembled onto nitrometer by user • Rated to 11.3 cal/cm² when tested to ASTM F2178-2008 (ref. NFPA 70E-2012, Hazard Risk Category 2), and when worn with a V-Gard Hard Hat (PN 475358) and V-Gard Frame (PN 10121266) and V-Gard Standard Chin Protector (PN/10115827) • Call MSA Customer Service (800-MSA-2222) for protection levels when using this V-Gard Arc Visor with other V-Gard Frames, V-Gard Chin Protectors and MSA Helmet combinations

¹Do not use V-Gard Arc Visors with V-Gard Headgear. These visors are designated for use with specified V-Gard Frames and MSA helmets ONLY. See "V-Gard Headgear" for additional details.

V-Gard Chin Protectors¹

V-Gard Chin Protectors work with select V-Gard Nitrometers to help provide extra protection from impact and splash hazards to face and neck.

CHIN PROTECTORS			
		P/N 10115828 Retractable Chin Protector	<ul style="list-style-type: none"> • 3.82" (9.7 cm) in height, when unretracted • Unique retractable plates allow greater flexibility of head movement both up and down, as well as side-to-side • Opaque polycarbonate ensures safety and standards compliance with clear, tinted, shaded and coated V-Gard Visors • Min Order Qty: 5
		P/N 10149029 Chin Protector	<ul style="list-style-type: none"> • 2.86" (7.26 cm) in height • Clear PC for improved visibility • Compact, lightweight design provides additional protection between chin and neck area • Should not be worn with tinted or shaded nitrometers to ensure compliance with stated Standards markings/requirements • Min Order Qty: 5
		P/N 10115827 Standard Chin Protector	<ul style="list-style-type: none"> • 2.86" (7.26 cm) in height • Opaque polypropylene ensures safety and standards compliance with clear, tinted, shaded and coated V-Gard Visors • Compact, lightweight design provides additional protection between chin and neck area • Min Order Qty: 5

V-Gard Accessory System Kits

V-Gard Accessory System Kits are designed to offer easy customer solutions for a variety of needs – all in one convenient box.

V-GARD ACCESSORY SYSTEM KITS			
	P/N 10118695 V-Gard Accessory System Kit with V-Gard Cap	Contains: <ul style="list-style-type: none"> • White V-Gard Cap with ratchet suspension (PN 475358) • V-Gard Frame for Slotted Caps with debris control (PN 10115730) • V-Gard Clear, PC Visor, 8" (20.3 cm) x 17" (43.2 cm) x .04" (1.02 mm) (PN 10115836) 	
	P/N 10118697 V-Gard Accessory System Kit (without V-Gard Cap)	Contains: <ul style="list-style-type: none"> • V-Gard Universal Frame for Caps with debris control (PN 10115822) • V-Gard Clear, PC Visor, 8" (20.3 cm) x 17" (43.2 cm) x .04" (1.02 mm) (PN 10115836) Does not contain a MSA safety helmet.	
	P/N 10118694 V-Gard Forestry Kit	Contains: <ul style="list-style-type: none"> • Hi-viz orange V-Gard Cap with ratchet suspension (PN 488146) • V-Gard Frame for Slotted Caps with debris control (PN 10115730) • V-Gard Mesh Nitrometer (PN 10116558) • V-Gard Retractable Chin Protector (PN 10115828) • left/RIGHT, HIGH (NRR 28 db) Cap-Mounted Earmuffs (PN 10087422) 	
	P/N 10118696 ² V-Gard Accessory Arc Kit	Contains: <ul style="list-style-type: none"> • White V-Gard Cap with ratchet suspension (PN 475358) • V-Gard Frame for Slotted Caps (PN 10121266) • V-Gard Arc Nitrometer with V-Gard Standard Chin Protector (PN 10118480); must be assembled by user prior to wearing to secure stated calorie rating. • Rated to 11.3 cal/cm² when tested to ASTM F2178-2008 (ref. NFPA 70E-2012, Hazard Risk Category 2), and when worn with a V-Gard Hard Hat (PN 475358), V-Gard Frame (PN 10121266) and V-Gard Standard Chin Protector (PN/10115827) 	

V-Gard Accessory System Replacement Parts³

V-GARD ACCESSORY SYSTEM REPLACEMENT PARTS			
	P/N 10117496 (2 pair)	<ul style="list-style-type: none"> • Slot Adaptors (2 pair). For use with V-Gard Frames for Slotted Caps • Sold in boxes of 10 (5 packages of 2) 	
	P/N 10116539	<ul style="list-style-type: none"> • Debris Control for V-Gard Cap Frames • Debris control exceeds EN requirements for molten metal • All-rubber construction • Min Order Qty: 10 	
	P/N 10117495	<ul style="list-style-type: none"> • Heavy Duty Rubber Strap for V-Gard Universal Cap or Hat Frames • Min Order Qty: 10 	

¹ MSA V-Gard Chin Protectors meet the applicable safety requirements as noted on the V-Gard Nitrometer Visor when worn in conjunction with V-Gard Frames and V-Gard Nitrometer Visors.

² Call MSA Customer Service (800-MSA-2222) for protection levels when using this V-Gard Arc Visor with other V-Gard Frames, V-Gard Chin Protectors and MSA Helmet combinations.

³ Use only genuine MSA V-Gard Accessory System replacement parts to help ensure compatibility and compliance. MSA does not warrant, guarantee, or promote the use of components manufactured by other companies when used in conjunction with MSA products.





V-Gard Winter Liners

Flame resistant (FR) garments are made of special fibers that allow them to self-extinguish when exposed to flame or thermal ignition. Flame resistance cannot be removed by washing. Unlike many other winter liners in the market, ALL layers of fabric in V-Gard Supreme Liners are flame resistant, affording FR protection throughout the life of the product.¹ For this reason, only V-Gard Supreme Liners offer resistance to arc exposure.



Flame retardant garments have been chemically treated to resist burning when a flame is present. While chemical treatment can wear off after the first wash, all layers of ALL V-Gard Select products offer flame retardancy up to 50 washings.



<p>V-GARD SUPREME LINERS</p> 		<p>FP/N 10118421 Flame-Resistant V-Gard Supreme Liner</p>	<ul style="list-style-type: none"> • Multiple layers of flame-resistant fabric • Fabric tested to withstand arc exposure to an ATPV of 8 cal/cm² • Water repellent • Adjustable chinstrap • Inside neck pocket holds warming packet² • Min Order Qty: 3
		<p>P/N 10118425 Flame-Resistant V-Gard Supreme Liner, Extended, 1-piece</p>	<ul style="list-style-type: none"> • Multiple layers of flame-resistant fabric • Fabric tested to withstand arc exposure to an ATPV of 8 cal/cm² • Water repellent • Inside neck pocket holds warming packet² • Extended nape and wraparound collar for tucking into coat/shirt • Quilted flaps allow uncompromised hearing protection levels when using earmuffs • Min Order Qty: 3
		<p>P/N 10118427 Flame-Resistant V-Gard Supreme Liner, 2-piece</p>	<ul style="list-style-type: none"> • Multi-layered flame-resistant top cap • Fabric tested to withstand arc exposure to an ATPV of 8 cal/cm² • Water repellent • Inside neck pocket holds warming packet² • Extended, zipper on/off high-bulk flame-resistant knit bottom • No metal parts • Min Order Qty: 3

¹Garment care instructions must be followed. ²Warming packets available at most sporting goods retailers; not sold with liners.



According to one of the formal, certifying test houses, winter liners cannot be certified to "NFPA 2112, Standard on Flame-Resistant Garments for Protection of Industrial Personnel Against Flash Fire," as they are not considered "garments" under this Standard. Please contact MSA Customer Service for details.

V-Gard Winter Liners

<p>V-GARD SELECT LINERS</p> 	 	<p>P/N 10129659 Flame-Retardant V-Gard Select Liner, 2-piece</p>	<ul style="list-style-type: none"> • Double-layered flame retardant top cap, up to 50 washes • Extended, zipper on/off double-layer knit bottom; flame retardant, up to 50 washes • No metal parts • Water repellent • Min Order Qty: 12
	 	<p>P/N 10129654 Flame-Retardant V-Gard Select Liner, Extended, No Earflaps</p>	<ul style="list-style-type: none"> • Two layers of fabric, flame retardant to 50 washes • Water repellent • Extended nape and wraparound collar for tucking into coat/shirt • For applications where earmuffs are not worn • Min Order Qty: 12
		<p>P/N 10118420 Flame-Retardant V-Gard Select Liner</p>	<ul style="list-style-type: none"> • Two layers of fabric, flame retardant to 50 washes • Water repellent • Adjustable chinstrap • Quilted flaps allow uncompromised hearing protection levels when using earmuffs • Min Order Qty: 12
<p>V-GARD VALUE LINERS</p>	 	<p>P/N 10118417 V-Gard Liner Knit Cap</p>	<ul style="list-style-type: none"> • Stylish skullie cap • Design prevents liner from obstructing vision • 100% high bulk acrylic • Min Order Qty: 12
		<p>P/N 10118418 V-Gard Liner Knit Hat-Cap Cover</p>	<ul style="list-style-type: none"> • 100% acrylic • Bright yellow-green for greater visibility • Full face tube mounts under or over brim of MSA caps or hats, covering ears, mouth, cheeks and neck • Extended nape and wraparound collar for tucking into coat/shirt • Min Order Qty: 12
	 	<p>P/N 10118419 V-Gard Value Liner</p>	<ul style="list-style-type: none"> • 100% cotton twill • Adjustable chin strap • Min Order Qty: 12
		<p>P/N 10118422 V-Gard Value Liner, Extended</p>	<ul style="list-style-type: none"> • 100% cotton twill • Extended nape and wraparound collar for tucking into coat/shirt • Min Order Qty: 12

SunShade Hard Hat Accessory



MSA SunShades not only help to protect wearer's ears and neck from sun and heat, but also enhance worker visibility with contrasting color band and reflective striping. Fit most hats and caps. Features include:

- Breathable, bright mesh fabric
- Choice of bright yellow-lime or orange colors
- Hat clips help to keep SunShade from falling or rotating
- Sold in packages of 5 ONLY

SUNSHADE HARD HAT ACCESSORY	10098032	SunShade, Yellow-Green, with reflective striping
	10098031	SunShade, Orange, with reflective striping

Helmet Lights



MSA offers two helmet lights that fit into our special cap adapters. Both of the lights are FM and CSA-approved for intrinsic safety, and are non-incendive.

HELMET LIGHTS	697259*	VersaLite Helmet Light with 2 AA alkaline batteries
	697261**	Stealthlite Helmet Light (batteries not included)
	814322	Light holder for slotted cap, no metal parts

*VersaLite Helmet Light does not include, but requires, slot adapter to work in helmet slots.
 **Stealthlite Helmet Light does not include, but requires, batteries and a light holder to work in helmet slots.

Sun Shields



Protect ears and neck from sun and heat with these easily attachable brims. Extends brim all the way around the helmet. Made of flexible, resilient polyurethane, these brims feature a smoke-tinted, Lexan constructed front:

- Polyurethane brim extender protects against sun and heat
- Easily attaches to helmets and caps
- Smoke-tinted Lexan front for extra protection

SUN SHIELD HARD HAT ACCESSORY	697290	Sun Shield, for Standard V-Gard Caps only
	697410	Sun Shield, for V-Gard Hats only
	10039114	Sun Shield, for V-Gard 500 Caps only

Custom Terri-Band Sweatband




Custom design fits all MSA suspensions. Washable, with plastic snaps.

(See page 6 for details on the Fas-Trac III sweatband accessory.)

CUSTOM TERRY SWEATBAND	10068911	Custom Terri-Band Sweatband (single)
	696688	Custom Terri-Band Sweatband (pkg of 10)

Chinstraps

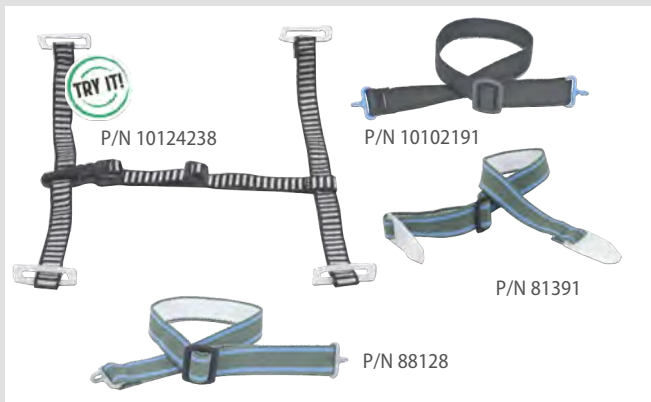

Put and keep MSA helmets in their place with these comfortable, adjustable chinstraps.

- 2-, 3- and 4-point chinstraps available
- Non-metal chinstraps keep helmets in place
- Attaches directly to shell or suspension (as noted)
- Flexible construction and adjustable design for long-wearing comfort
- Available in cotton, polyester, nylon, or Nomex® webbing

CHINSTRAPS	P/N	Description
	10124238	Chinstrap, 4-pt, 3/4" polyester webbing, attaches to suspension (pkg of 10)
	10102191 ¹	Chinstrap, 2-pt, 3/4" Nomex webbing, attaches to shell
	81390	Chinstrap, 2-pt, 3/4" cotton webbing, attaches to suspension ²
	81391	Chinstrap, 2-pt, 3/4" polyester webbing, attaches to suspension ²
	81329	Chinstrap, 2-pt, 3/4" cotton webbing, attaches to shell
	88128	Chinstrap, 2-pt, 3/4" polyester webbing, attaches to shell
	804629	Chinstrap, 3-pt, 3/4" nylon webbing, for Vanguard helmets only


Medical Information Carrier System



This simple helmet accessory provides crucial, lifesaving information in the event of a medical crisis on the job. Trilingual for today's multicultural workforce.

MEDICAL INFORMATION CARRIER SYTEM	10013393	Medical Information Carrier System (pkg of 10)—English/Spanish/French
-----------------------------------	----------	---

In-Service Helmet Label

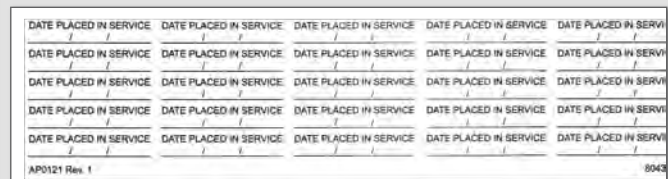

Add this label to the inside of helmet with the date the helmet was first used to track the shell's service life. MSA recommends that you replace the shell every 5 years and the suspension every 12 months.

IN-SERVICE HELMET LABEL	804358	In-Service Helmet Label (sheet of 25)
-------------------------	--------	---------------------------------------

¹For elevated temperatures

² For use with MSA Staz-On suspensions only.

It is important that hearing protection used in a work environment provides sufficient noise attenuation to protect workers, but not so much protection that users are prevented from hearing their co-workers, alarms and other important signals. If workers must shout to hear each other from three feet away, noise levels are probably 85 dBA or more, and hearing protectors are recommended.

For environments with impulse noises, select an electronic muff that not only amplifies sound to a predetermined safe level (82 dBA or lower), but which will also allow workers to communicate. Unless the environment has very loud or impulse noises (such as gunfire or pneumatic equipment), properly selected, fitted and worn passive hearing protectors should provide sufficient protection. Check with the site safety specialist for specific hearing protection required.

Hearing Protection: Cap-Mounted, Electronic

Classification: Cap-mounted, electronic

Market(s): General industry, manufacturing, repair and maintenance, construction, oil and gas, forestry, shipbuilding, mining, military

Application(s): Hunting/shooting, food processing, construction, airlines, industries with high impulse noises, road maintenance, railroad work, pneumatic tools

Available Styles: left/RIGHT Cut-off
left/RIGHT Cut-off with FM radio (Dual Pro)

Noise Reduction Rating (NRR): 20 dBA

Features: Award-winning product design accounts for varying head, face and ear sizes/shapes
AUX input for connection to external devices, such as a portable media player or comms set
Battery save function and low battery warning
Earmuffs flip up and out of the way when not in use

Standards: Meets ANSI S3.19-1974 and CSA Class A standards

CAP-MOUNTED ELECTRONIC HEARING PROTECTION		Product Name	Part No.	Product Specifics
		left/RIGHT CutOff Pro	10111823 (yellow) 10111826 (blue)	<ul style="list-style-type: none"> • Amplifies weak sounds, letting speech and important signals through while protecting from high-impulse noise • Designed to work with MSA slotted helmets, including V-Gard Cap, V-Gard 500 Cap, Topgard® Cap, Thermalgard® Cap, and Super-V Cap • Up to 1000-hour battery life • Volume memory
		left/RIGHT Dual Pro	10111832 (blue)	<ul style="list-style-type: none"> • The level-dependent left/RIGHT Dual Pro ear muff provides a high level of hearing protection with a built-in FM radio • FM radio offers excellent reception and superior sound quality • Large push buttons for ease of use

Hearing Protection: Helmet-Mounted, Passive

Classification: Helmet-Mounted, Passive

Market(s): General industry, manufacturing, repair and maintenance, construction, oil and gas, forestry, shipbuilding, mining, military


Application(s): Confined space, welding, sanding/grinding, power tools, occupations using noisy equipment

Available Styles: For Caps (left/RIGHT, Sound Control)
For Full Brim Slotted Helmets (Sound Control SH)

Noise Reduction Rating (NRR): Varies by product; see "Product Specifics" below. Stated NRR for medium V-Gard Helmets.

Features: Earmuffs flip up and out of the way when not in use

Standards: Meets ANSI S3.19-1974 and CSA Class A standards

HELMET-MOUNTED PASSIVE HEARING PROTECTION		Product Name	Part No.	Product Specifics
		left/RIGHT (HIGH)	10087422	<ul style="list-style-type: none"> • NRR 28 dBA • For MSA slotted caps • Distinct bright yellow cups • Dedicated right and left ear cups are designed to fit ears of all shapes and sizes for increased comfort and protection. • Precise fit provides maximum loud noise protection using minimal cup size • Muff cups adjust independently
		left/RIGHT (MED)	10087429	<ul style="list-style-type: none"> • NRR 25 dBA • For MSA slotted caps • Distinct blue cups
		Sound Control HPE	10061272	<ul style="list-style-type: none"> • NRR 27 dBA • For MSA slotted caps • Ideal for airfields, power plants and other areas with intense noise • The highest-rated protection available for low-frequency environments • Super-soft ear cushions help ensure all-day comfort
		Sound Control EXC	10061230	<ul style="list-style-type: none"> • NRR 25 dBA • For MSA slotted caps • Excellent noise attenuation with maximum ear space in cups • Spring design offers low-pressure and a high level of comfort
		Sound Control XLS	10061535	<ul style="list-style-type: none"> • NRR 23 dBA • For MSA slotted caps • Excellent grip makes it easy to adjust the cups, even when wearing gloves
		SoundControl SH	10129327	<ul style="list-style-type: none"> • NRR 25 dBA • For MSA Full Brim Slotted V-Gard Helmets • Three distinct wearing positions for ease of use • Easy cup height adjustment • Does not interfere with Class E rating of V-Gard Full Brim Helmet

Hearing Protection: Headband, Passive

Classification: Headband, passive

Market(s): Automotive, construction, food & beverage manufacturing, manufacturing, metal production & fabrication, military maintenance, repair and operation (MRO), mining, oil & gas, pharmaceutical, transportation







Application(s): Assembly, cleaning, demolition, electrical, sanding & grinding, machine operations, painting, sanding, welding

Available Styles: left/RIGHT
SoundControl
Economuff

Noise Reduction Rating (NRR): Varies by product; see "Product Specifics" below.



Features: Ease of use and consistent fit

Standards: Meets ANSI S3.19-1974 and CSA Class A standards

HEADBAND PASSIVE HEARING PROTECTION		Product Name	Part No.	Product Specifics
		left/RIGHT (HIGH)	10087399	<ul style="list-style-type: none"> • NRR 28 dBA • Distinct bright yellow cups • Dedicated right and left ear cups are designed to fit ears of all shapes and sizes for increased comfort and protection • Precise fit provides maximum loud noise protection using minimal cup size • Muff cups adjust independently
		left/RIGHT (MED)	10087426	<ul style="list-style-type: none"> • NRR 25 dBA • Distinct blue cups
		left/RIGHT (LOW)	10087436	<ul style="list-style-type: none"> • NRR 21 dBA • Distinct white cups
		Sound Control HPE	10061271	<ul style="list-style-type: none"> • NRR 26 dBA • Provides the highest-rated protection available for low-frequency environments • Padded headband and super-soft ear cushions • Wide headband with ventilated padding provides a firm and comfortable fit • Easily adjustable headband force for individual fit
		Sound Control EXC	10061229	<ul style="list-style-type: none"> • NRR 24 dBA • Wide and soft padding provides a firm fit • Adjustable headband force for individual fit • Two-point mounting system ensures pressure is distributed evenly around the cushion
		Economuff	10004291	<ul style="list-style-type: none"> • NRR 20 dBA • Large earcup openings to fit most ear sizes • Soft, wide cushions for even pressure and extra comfort • Outstanding comfort and protection for the budget-conscious

Hearing Protection: Earplugs

- Classification:** Earplugs, Foam
- Market(s):** General industry, manufacturing, repair and maintenance, construction, oil and gas, forestry, shipbuilding, mining, military
- Application(s):** Assembly, cleaning, demolition, electrical, sanding & grinding, machine operations, painting, sanding
- Available Styles:** Corded, 200-pair with jar-style counter dispenser
Uncorded, 200-pair with jar-style counter dispenser
- Noise Reduction Rating (NRR):** 31 dBA
- Features:** 2-packs, individually wrapped expandable foam ear plugs
Soft, low ear pressure plugs are comfortable for a variety of activities
Simple to roll foam easily inserts into ear and then expands for a comfortable, custom fit
- Standards:** Meets ANSI S3.19-1974 and CSA Class A standards

EARPLUGS		Product Name	Part No.	Product Specifics
		SoundControl® Form Fit II Earplugs, Corded	10151069	<ul style="list-style-type: none"> • Corded to avoid misplacement or loss • Easy to roll foam inserts easily into ear • Min Order Qty: 200 pair dispenser
		SoundControl® Form Fit II Earplugs, Uncorded	10151070	<ul style="list-style-type: none"> • Uncorded • Easy to roll foam expands for a comfortable, custom fit • Min Order Qty: 200 pair dispenser

Sightgard Vertoggle™: Safety Goggle/Faceshield Combination

- Classification:** Splash and impact
- Market(s):** Construction, food and beverage, general manufacturing and industry, mining, oil and gas, pharmaceuticals, primary metals, transportation, shipbuilding
- Application(s):** Cleaning, chipping, chiseling, drilling, grinding, machining, painting, power washing, sanding, sawing, splash
- Material:** Polycarbonate (clear lens/frosted faceshield)
- Features:** Anti-fog/anti-scratch coatings on goggle lens
Impact (Z87+) and Splash-rated (D3)
Unique, articulated lift-front retains the shield on the goggle in any of five positions
- Standards¹:** ANSI/ISEA Z87.1-2010 and CSA Z94.3
- Certification:** Third-party by Intertek and CSA International
- Min Order Qty:** 5

SPLASH AND IMPACT APPLICATIONS		Model	Part No.	Product Specifics
		Vertoggle 	10150069	<ul style="list-style-type: none"> • Anti-fog and anti-scratch coatings on goggle lens • Indirect venting on goggle and faceshield improve airflow while providing splash and high impact protection • Entire assembly tested at ANSI/ISEA Z87.1-2010 faceshield impact speed (300 ft/sec) • Soft, pliable goggle body helps ensure all-day comfort • Fully adjustable FR-tested (CSA Z94.3 test methodology) elastic strap prevents hair pulling • Disposable respirators can be worn under shield • Designed to work with MSA goggle retainers

Sightgard Safety Glasses: Indoor Humid Conditions

Classification: Indoor: humid environments

Market(s): Facility maintenance, repair and operations, construction, food and beverage, general manufacturing and industry, mining, oil and gas, pharmaceuticals, transportation, shipbuilding, automotive

Application(s): Assembly and mechanical, drilling, grinding, machining, painting, sanding, sawing











Material: Polycarbonate

Features: Anti-fog coating
Clear lenses
Impact-rated (Z87+)
Anti-scratch coating (as noted)

Standards¹: ANSI/ISEA Z87.1-2010 and CSA Z94.3 (as noted)

Certification: Third-party by Intertek and CSA International




Min Order Qty: 12

HUMID INDOOR APPLICATIONS	Model	Part No.	Product Specifics
	Alaska	10118473	<ul style="list-style-type: none"> • Frameless; lightweight • Padded, adjustable nosebridge
	Arctic Elite	10038845	<ul style="list-style-type: none"> • Rubber tipped temples and nosebridge for comfortable, yet secure fit
	Aurora	10026005	<ul style="list-style-type: none"> • Ratchet temple adjustment • Single, 7-base wrap curve lens • Tuff-Stuff™ Anti-scratch Coating
	Blockz	10106379	<ul style="list-style-type: none"> • Brow shelf prevents debris from falling into eyes • Sliding temple adjustment • Tuff-Stuff Anti-scratch Coating
	Essential Adjust 	10119761	<ul style="list-style-type: none"> • Horizontal and vertical temple adjustment
	Pyrenees 	10033718	<ul style="list-style-type: none"> • Full side protection • Dual injected, soft-tipped temples
	Voyager 	10065849	<ul style="list-style-type: none"> • Single wrap-style lens

¹ CSA International certified models are denoted with a  symbol

Sightgard Safety Glasses: Outdoor, High Glare and Ultraviolet (UV) Exposure

- Classification:** Outdoor: high-glare with UV exposure
- Market(s):** Utility work, general industry, manufacturing, construction, oil and gas, forestry, shipbuilding, aviation, mining, transportation
- Application(s):** Chipping, chiseling, drilling, grinding, machining, power fastening, sanding, sawing, masonry, UV protection
- Material:** Polycarbonate
- Features:** Maximum UV protection ("U6")
Rich mirrored or dark tinted lenses reduce glare
Impact-rated (Z87+)
Anti-fog/anti-scratch coating (as noted)
- Standards¹:** ANSI/ISEA Z87.1-2010 and CSA Z94.3 (as noted)
- Certification:** Third-party by Intertek and CSA International
- Min Order Qty:** 12

OUTDOOR HIGH-GLARE/ UV EXPOSURE APPLICATIONS		Model	Part No.	Product Specifics
		Alaska	10110420	<ul style="list-style-type: none"> Rich silver mirror on a grey tint lens reduces light transmission, keeping eyes comfortable in sunlight Frameless; lightweight Padded, adjustable nosebridge
		Espresso GlareGone™	10106383	<ul style="list-style-type: none"> Polarized filter lenses block intense light Dark brown tint lens helps further reduce glare
		Racer Red	10106381	<ul style="list-style-type: none"> Rich-red mirrored lens reflects light and reduces glare without color degradation Sporty, single, wide-wrap lens Anti-fog coating













Under ANSI/ISEA Z87.1-2010 there is a required marking if the manufacturer claims protection from UV. Look for eyewear that both meets ANIS/ISEA Z87.1-2010 and has a "U" mark.

¹ CSA International certified models are denoted with a  symbol

Sightgard Safety Glasses: Indoor/Outdoor

- Classification:** Indoor/outdoor
- Market(s):** General industry, manufacturing, construction, oil and gas, forestry, shipbuilding, automotive, food and beverage, mining, pharmaceuticals, primary metals, transportation
- Application(s):** Assembly and mechanical, chipping, chiseling, cleaning, drilling, grinding, machining, masonry, riveting, sanding, sawing, UV protection
- Material:** Polycarbonate, indoor/outdoor or light mirroring
- Features:** Maximum UV protection ("U6")
Light mirror lenses provide glare reduction without significantly reducing light transmittance
Impact-rated (Z87+)
Anti-fog and/or anti-scratch coatings (as noted)
- Standards¹:** ANSI/ISEA Z87.1-2010 and CSA Z94.3 (as noted)
- Certification:** Third-party by Intertek and CSA International
- Min Order Qty:** 12

INDOOR/OUTDOOR APPLICATIONS	Model	Part No.	Product Specifics
 	Arctic	10088179	<ul style="list-style-type: none"> • Blue mirror reduces glare without causing color degradation • Popular, lightweight model • Full side coverage • Anti-scratch coating
 	Artic Elite	10059671	<ul style="list-style-type: none"> • Indoor/outdoor mirror allows workers to go from bright to low light conditions • Rubber tipped temples and nosebridge for comfortable, yet secure fit • Anti-fog coating
	Essential Adjust 	10119757	<ul style="list-style-type: none"> • Indoor/outdoor mirror allows workers to go from bright to low light conditions • Horizontal and vertical temple adjustment • Anti-scratch coating
	Essential Adjust 	10119758	<ul style="list-style-type: none"> • Light silver mirror reduces glare • Horizontal and vertical temple adjustment • Anti-fog coating
 	Vista™	10070916	<ul style="list-style-type: none"> • Indoor/outdoor mirror allows workers to go from bright to low light conditions • Vertical temple adjustment • Lightweight, single lens • Tuff-Stuff Anti-scratch Coating






A common misconception is that all polycarbonate blocks UV. This is not the case. If UV filtration claims are made by a manufacturer, under ANSI/ISEA Z87.1-2010, applicable UV filtration markings must be placed on product.

¹ CSA International certified models are denoted with a  symbol

Sightgard Safety Glasses: Outdoor with UV Exposure














- Classification:** Outdoor: UV exposure
- Market(s):** General industry, manufacturing, construction, oil and gas, forestry, shipbuilding
- Application(s):** Chipping, splash, chiseling, drilling, grinding, machining, power fastening, sanding, sawing
- Material:** Polycarbonate
- Features:** Maximum UV protection ("U6")
 Grey tint lenses offer glare reduction with the least amount of color distortion
 Impact-rated (Z87+)
 Anti-fog coating (as noted)
- Standards¹:** ANSI/ISEA Z87.1-2010 and CSA Z94.3 (as noted)
- Certification:** Third-party by Intertek and CSA International
- Min Order Qty:** 12

OUTDOOR UV EXPOSURE APPLICATIONS		Model	Part No.	Product Specifics
		Alaska	10118474	<ul style="list-style-type: none"> • Frameless; lightweight • Padded, adjustable nosebridge • Anti-fog coating
		Essential Adjust 	10119760	<ul style="list-style-type: none"> • Gun metal silver frame with horizontal and vertical temple adjustment • Anti-fog coating
		Feather Fit	10106384	<ul style="list-style-type: none"> • Comfortable rubber flange nosepiece • Rubber temple grips help glasses stay put under hot working conditions
		Nuevo Wrap 	10106385	<ul style="list-style-type: none"> • Stylish, full wrap coverage • Anti-fog coating
		Voyager 	10065850	<ul style="list-style-type: none"> • Single lens • Anti-scratch coating

¹ CSA International certified models are denoted with a  symbol

Sightgard Safety Glasses: Outdoor







- Classification:** Outdoor: general use
- Market(s):** Aviation, general manufacturing, mining, oil and gas, pharmaceuticals, primary metals, transportation
- Application(s):** Assembly and mechanical, chipping, chiseling, drilling, grinding, machining, sanding, sawing
- Material:** Polycarbonate
- Features:** Grey tint lenses offer glare reduction with the least amount of color distortion
Anti-fog/anti-scratch coatings (as noted)
Impact-rated (Z87+)
- Standards¹:** ANSI/ISEA Z87.1-2010 and CSA Z94.3 (as noted)
- Certification:** Third-party by Intertek and CSA International
- Min Order Qty:** 12

GENERAL OUTDOOR USE APPLICATIONS		Model	Part No.	Product Specifics
		Arctic	697515	<ul style="list-style-type: none"> • Popular, lightweight model • Full side coverage • Anti-scratch coating
		Arctic Elite	10038846	<ul style="list-style-type: none"> • Rubber tipped temples and nosebridge for comfortable, yet secure fit • Anti-fog coating
		EasyFlex	10070918	<ul style="list-style-type: none"> • Temples flex for a custom fit • Tuff-Stuff Anti-scratch Coating
		EasyFlex	10070921	<ul style="list-style-type: none"> • Rich-orange mirrored lens reflects light and reduces glare without color degradation • Temples flex for a custom fit • Tuff-Stuff Anti-scratch Coating
		Luxor 	697517	<ul style="list-style-type: none"> • Horizontal temple adjustment • Wrap-style single lens • Tuff-Stuff Anti-scratch Coating
		Pyrnees™ 	10033719	<ul style="list-style-type: none"> • Full side protection • Dual-injected soft-tipped temples • Anti-fog coating

¹ CSA International certified models are denoted with a  symbol

Sightgard Safety Glasses: Low Light













Classification:	Low light
Market(s):	Transportation, inspection and repair, assembly, general industry, indoor construction, shipbuilding, automotive, food and beverage, pharmaceuticals
Application(s):	Assembly, chipping, chiseling, drilling, grinding, machining, pouring/casting, power fastening, riveting, sanding, sawing
Material:	Polycarbonate
Features:	Contrast-enhancing lenses in various tints Impact-rated (Z87+) Anti-fog or anti-scratch coatings (as noted)
Standards¹:	ANSI/ISEA Z87.1-2010 and CSA Z94.3 (as noted)
Certification:	Third-party by Intertek and CSA International
Min Order Qty:	12

LOW LIGHT APPLICATIONS		Model	Part No.	Product Specifics
		EasyFlex	10070919	<ul style="list-style-type: none"> • Amber lens increases contrast in low light • Temples flex for a custom fit • Tuff-Stuff Anti-scratch Coating
		Pyrenees™ 	10033740	<ul style="list-style-type: none"> • Amber lens increases contrast in low light • Full side protection • Dual-injected soft-tipped temples • Anti-fog coating
		Yellow Jacket™ 	10106386	<ul style="list-style-type: none"> • Amber gradient lens enhances perception under changing conditions of light and shadow • Full side protection • Maximum UV protection (U6)

¹ CSA International certified models are denoted with a  symbol

Sightgard Safety Glasses: Over-the-Glasses



- Classification:** Over-the-glasses
- Market(s):** Facility safety, maintenance, repair and operations, overhaul, general industry, manufacturing, construction, oil and gas, metalworking, automotive
- Application(s):** Assembly and mechanical, drilling, grinding, machining, masonry, power fastening, riveting, sanding, sawing
- Material:** Polycarbonate
- Features:** Impact-rated (Z87+)
Maximum UV protection ("U6") (as noted)
Anti-fog coating (as noted)
- Standards¹:** ANSI/ISEA Z87.1-2010 and CSA Z94.3 (as noted)
- Certification:** Third-party by Intertek and CSA International
- Min Order Qty:** 12

RX GLASSES REQUIRED APPLICATIONS		Model	Part No.	Product Specifics
		OvrG™	10110419	<ul style="list-style-type: none"> • For use over small-to-medium Rx glasses • Integral nose pad for added comfort • Clear lenses • Anti-fog coating
		OvrG™ II 	10118475	<ul style="list-style-type: none"> • Clear lenses • For use over small-to-medium Rx glasses • Squared-off, stylish look • Maximum UV protection • 30% lighter weight than standard visitor specs
		OvrG II 	10118476	<ul style="list-style-type: none"> • Indoor/outdoor mirrored lens • For use over small-to-medium Rx glasses • Maximum UV protection
		Plant Visitor 	10027944 697500 (10/BOX) 10008174 (144/BOX)	<ul style="list-style-type: none"> • Classic look • Fits over most Rx glasses • Integral, vented side shields
		Rx Overglasses	10008175	<ul style="list-style-type: none"> • Clear lenses • Fits over most Rx glasses • Anti-fog coating • Horizontal and vertical temple adjustment

¹ CSA International certified models are denoted with a  symbol

Sightgard Safety Goggles

Classification:	Chemical and splash
Market(s):	Chemicals, construction, food and beverage, general manufacturing and industry, mining, oil and gas, pharmaceuticals, primary metals, transportation, shipbuilding, automotive
Application(s):	Cleaning, chemical mixing and use, chipping, chiseling, drilling, grinding, machining, painting, power washing, sanding, sawing, splash
Material:	Acetate lens
Features:	Clear Impact (Z87+) and Splash-rated (D3) Anti-fog coating
Standards¹:	ANSI/ISEA Z87.1-2010 and CSA Z94.3
Certification:	Third-party by Intertek and CSA International
Min Order Qty:	6

CHEMICAL AND SPLASH APPLICATIONS		Model	Part No.	Product Specifics
		FlexiChem™ iV 	10106281	<ul style="list-style-type: none"> • Soft, pliable goggle body ensures all-day comfort • Indirect vent helps eliminate fogging while retaining splash resistance • Acetate lens resists warping, cracking and crazing from chemical splash • Flame-retardant strap

Classification:	Industrial: impact/splash
Market(s):	Construction, food and beverage, general manufacturing and industry, mining, oil and gas, pharmaceuticals, primary metals, transportation, shipbuilding, automotive
Application(s):	Chipping, chiseling, drilling, grinding, machining, painting, power washing, sanding, sawing, splash
Material:	Polycarbonate
Features:	Clear Anti-fog coating Indirect venting helps keep lens fog-free Impact-rated (Z87+) Splash-rated (D3)
Standards¹:	ANSI/ISEA Z87.1-2010 and CSA Z94.3
Certification:	Third-party by Intertek, CSA International, UL
Min Order Qty:	6

INDUSTRIAL IMPACT/SPLASH APPLICATIONS		Model	Part No.	Product Specifics
		Clearvue® 200 	10029693	<ul style="list-style-type: none"> • Smoke frame helps reduce peripheral light, reducing glare • Compliant to CSA Z94.3
		Vault™ 	10106282	<ul style="list-style-type: none"> • Modern styling • Comfortable, thick strap • Tuff-Stuff anti-scratch coating

¹ CSA International certified models are denoted with a  symbol

Eyewear Accessories



Goggle Retainers

Sturdy neoprene-rubber accessory can be used with any protective cap or hat. Retains goggle or Vertogoggle on headwear when not in use and securely when worn for eye protection. **MSA goggle retainers are manufactured for use ONLY with MSA goggles in order to comply with ANSI/ISEA Z87.1-2010.**

P/N: **459458** Goggle Retainer, for caps

P/N: **449895** Goggle Retainer, for hats

Lanyard

P/N: **10020871** Deluxe Eyewear Lanyard (pk/12)

Features: Holds eyewear securely
Lanyard strap slides over temple ends



Cleaning Accessories

P/N: **13016** 4 oz. Fogpruf™ Cleaner Refill

P/N: **10022087** Pre-moistened Towelettes (box of 100)

Note: This bulletin contains only a general description of the products shown. While uses and performance capabilities are described, under no circumstances shall the products be used by untrained or unqualified individuals and not until the product instructions including any warnings or cautions provided have been thoroughly read and understood. Only they contain the complete and detailed information concerning proper use and care of these products.



MSA - The Safety Company
1000 Cranberry Woods Drive
Cranberry Township, PA 16066 USA
Phone 724-776-8600
www.MSAsafety.com

U.S. Customer Service Center
Phone 1-800-MSA-2222
Fax 1-800-967-0398

MSA Canada
Phone 1-800-672-2222
Fax 1-800-967-0398

MSA Mexico
Phone 011 52 442 227.3949
Fax 011 52 442 227 3943

MSA International
Phone 724-776-8626
Toll Free 1-800-672-7777
FAX 724-741-1553

