




RaptorGrip | Heavy-Duty Polyethylene Tape

TECHNICAL DATA SHEET

Backing: Polyethylene Film

Adhesive: Synthetic Rubber

Available Colors: Blue, Yellow

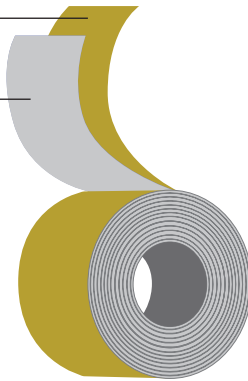

Applications:

- Hang, patch, and seam polyethylene sheeting
- Seal waste disposal bags
- Polyethylene splicing

Feature	Benefit
Polyethylene Film Backing	<ul style="list-style-type: none"> • Conformable with low elongation properties • Good strength and durability • Resists moisture and solvents • Pinked/Serrated Edge for hand tearability
Synthetic Rubber Adhesive	<ul style="list-style-type: none"> • High tack adhesive bonds well to poly sheeting • Excellent vertical hanging strength • Repositionable and clean removal from many surfaces

SPECIFICATIONS

	STANDARD	METRIC	TEST METHOD
Total Thickness	7.0 mils	0.18 mm	ASTM D-1000
Adhesion to Steel	75 oz/in	8.21 N/cm	PSTC-101
Adhesion to Backing	35 oz/in	3.8 N/cm	PSTC-101
Tensile Strength	25 lb/in	43.78 N/cm	ASTM D-1000
Elongation	85%		
Operating Temperature	20 to 200 °F	-7 to 93 °C	

Locations Nationwide

Visit www.aramsco.com to find a branch nearest you.