


## PE Abatement/Tarp Tape

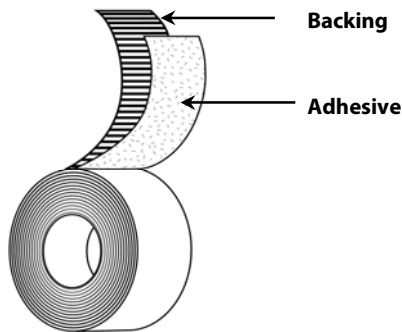

**Backing:** Polyethylene Film

**Adhesive:** Rubber

**Liner:** N/A

**Colors:** Black, Yellow

**Specifications:** N/A

**Standard Sizes:** 48mm x 55m, 72mm x 55m

### Applications

- Hang, seam and patch polyethylene sheeting
- Seal polyethylene waste disposal bags
- Hang, seam and patch heavy duty tarp materials both indoors and outdoors
- General purpose abatement applications

### Features

- Polyethylene Film Backing
- Natural rubber based adhesive

### Benefits

- Highly Conformable and flexible
- Excellent durability & solvent resistance
- Clean easy tear
- High tack for a secure bond
- Repositionable & clean removal - no residue
- Strength of a duct tape without the irregular adhesive surface

### Physical Properties

	Standard UOM	Metric UOM	Test Method
<b>Total Thickness</b>	7.5 mils	190.5 mic	ASTM D-1000
<b>Adhesion to Steel</b>	42 oz/in	4.60 N/cm	PSTC-101
<b>Tensile Strength</b>	22 lb/in	38.53 N/cm	ASTM D-1000
<b>Operating Temperature</b>	40 to 180° F	4 to 82° C	
<b>Elongation</b>	75%		

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F  
 Standard Shelf Life (at 25C): 24 months from date of manufacture.

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are typical values submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.